

1-1-2007

Batch Blast Extractor: An Automated Blastx Parser Application

Mehdi Pirooznia

University of Southern Mississippi, Mehdi.Pirooznia@usm.edu

Edward J. Perkins

U.S. Army Engineer Research and Development Center, edward.j.perkins@erdc.usace.army.mil

Youping Deng

University of Southern Mississippi, youping.deng@usm.edu

Follow this and additional works at: https://aquila.usm.edu/fac_pubs



Part of the [Genetics and Genomics Commons](#)

Recommended Citation

Pirooznia, M., Perkins, E. J., Deng, Y. (2007). Batch Blast Extractor: An Automated Blastx Parser Application. *BMC Genomics*, 9(S2), 1-5.

Available at: https://aquila.usm.edu/fac_pubs/8483

This Article is brought to you for free and open access by The Aquila Digital Community. It has been accepted for inclusion in Faculty Publications by an authorized administrator of The Aquila Digital Community. For more information, please contact Joshua.Cromwell@usm.edu.

Research

Open Access

Batch Blast Extractor: an automated blastx parser application

Mehdi Pirooznia¹, Edward J Perkins² and Youping Deng^{*1}

Address: ¹Department of Biological Sciences, University of Southern MS, Hattiesburg, 39406, USA and ²Environmental Laboratory, U.S. Army Engineer Research and Development Center, 3909 Halls Ferry Rd, Vicksburg, MS, 39180, USA

Email: Mehdi Pirooznia - Mehdi.Pirooznia@usm.edu; Edward J Perkins - Edward.J.Perkins@erdc.usace.army.mil; Youping Deng* - youping.deng@usm.edu

* Corresponding author

from IEEE 7th International Conference on Bioinformatics and Bioengineering at Harvard Medical School Boston, MA, USA. 14–17 October 2007

Published: 16 September 2008

BMC Genomics 2008, 9(Suppl 2):S10 doi:10.1186/1471-2164-9-S2-S10

This article is available from: <http://www.biomedcentral.com/1471-2164/9/S2/S10>

© 2008 Pirooznia et al; licensee BioMed Central Ltd.

This is an open access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/2.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Abstract

Motivation: BLAST programs are very efficient in finding similarities for sequences. However for large datasets such as ESTs, manual extraction of the information from the batch BLAST output is needed. This can be time consuming, insufficient, and inaccurate. Therefore implementation of a parser application would be extremely useful in extracting information from BLAST outputs.

Results: We have developed a java application, Batch Blast Extractor, with a user friendly graphical interface to extract information from BLAST output. The application generates a tab delimited text file that can be easily imported into any statistical package such as Excel or SPSS for further analysis. For each BLAST hit, the program obtains and saves the essential features from the BLAST output file that would allow further analysis. The program was written in Java and therefore is OS independent. It works on both Windows and Linux OS with java 1.4 and higher. It is freely available from: <http://mcbc.usm.edu/BatchBlastExtractor/>

Background

The NCBI BLAST database search tool is one of the most popular programs designed to solve single query problems. BLAST (Basic Local Alignment Search Tool) is the heuristic search algorithm employed by the programs blastp, blastn, blastx, tblastn, and tblastx. The BLAST programs were tailored for sequence similarity searching for example to identify homologs of a given query sequence [1].

The five common BLAST programs perform the following tasks: 1) blastp compares an amino acid query sequence

against a protein sequence database; 2) blastn compares a nucleotide query sequence against a nucleotide sequence database; 3) blastx compares the six-frame conceptual translation products of a nucleotide query sequence (both strands) against a protein sequence database 4) tblastn compares a protein query sequence against a nucleotide sequence database dynamically translated in all six reading frames (both strands), and 5) tblastx compares the six-frame translations of a nucleotide query sequence against the six-frame translations of a nucleotide sequence database.

```

BLASTX 2.2.13 [Nov-27-2005]

Reference: Altschul, Stephen F., Thomas L. Madden, Alejandro A. Schaffer,
Jinghui Zhang, Zheng Zhang, Webb Miller, and David J. Lipman (1997),
"Gapped BLAST and PSI-BLAST: a new generation of protein database search
programs", Nucleic Acids Res. 25:3389-3402.

Query= Contig1
      (465 letters)

Database: All non-redundant GenBank CDS
translations+PDB+SwissProt+PIR+PRF excluding environmental samples
      3,525,863 sequences; 1,211,011,241 total letters

Searching.....done

Sequences producing significant alignments:
                                     Score   E
                                     (bits) Value

sp|P80164|MLR_LUMTE Myosin regulatory light chain, striated musc... 126 3e-28
gb|AAG16892.1| myosin regulatory light chain [Riftia pachyptila] 125 4e-28
gb|AAW26951.1| SJCHGC00821 protein [Schistosoma japonicum] 100 1e-20
gb|ABD04174.1| myosin regulatory light chain 2-like protein [Ant... 100 3e-20
ref|XP_797359.1| PREDICTED: similar to Myosin regulatory light c... 99 4e-20
gb|AAS94012.1| MRLC [Clonorchis sinensis] 99 7e-20
ref|XP_881168.1| PREDICTED: similar to Myosin regulatory light c... 98 9e-20
emb|CAH04894.1| nonmuscle myosin II regulatory light chain [Sube... 98 1e-19
gb|AAT73618.1| calmodulin cam-205 [Daucus carota] 45 9e-04
gb|AAL87099.1| calmodulin [Sonneratia paracaseolaris] 45 9e-04
emb|CAA75057.1| calmodulin [Lycopersicon esculentum] 45 9e-04
gb|AAC61859.1| calmodulin mutant SYNCAM29 [synthetic construct] 45 9e-04

>sp|P80164|MLR_LUMTE Myosin regulatory light chain, striated muscle, 25 kDa isoform
(LC25)
gb|AAB25173.1| myosin regulatory light chain, LC25 [Lumbricus
terrestris=earthworms, muscle, Peptide, 195 aa]
prf||1908254A myosin:SUBUNIT=light chain:ISOTYPE=LC25
Length = 195

Score = 126 bits (316), Expect = 3e-28
Identities = 65/90 (72%), Positives = 71/90 (78%)
Frame = +2

Query: 194 APKRKFTGNVFALFKQPIQEFKEAFAMIDQNRDGIIDESDLAAIYQQIGREVESKILKE 373
AP K GNVFALFKQ QIQEFKEAF MIDQ+RDGII DL I+QQIGREV+ K++KE
Sbjct: 40 APIHK-VGNVFALFKQNPQIQEFKEAFTMIDQDRDGIIGPDDLGNIFQQIGREVDPKVVKE 98

Query: 374 MLKECPDKLNFTHFLTLFGEKLGHTSAATT 463
ML E +KLNFTHFLTLFGEKLGHT T
Sbjct: 99 MLAESAELKLNFTHFLTLFGEKLGHTDTEGT 128

>gb|AAG16892.1| myosin regulatory light chain [Riftia pachyptila]
Length = 192

Score = 125 bits (315), Expect = 4e-28
Identities = 63/91 (69%), Positives = 74/91 (81%), Gaps = 2/91 (2%)
Frame = +2

Query: 197 PKR--KFTGNVFALFKQPIQEFKEAFAMIDQNRDGIIDESDLAAIYQQIGREVESKILK 370
PKR + T NVFALF Q QIQEFKEAF M+DQNRDGIID DLA+I+QQIGR+ + K LK
Sbjct: 35 PKRAQRATSNVFALFNQAQIQEFKEAFTMDQNRDGIIDADDLASIFQQIGRDPDPKQLK 94

Query: 371 EMLKECPDKLNFTHFLTLFGEKLGHTSAATT 463
M++E P++LNFTHFLTLFGEKLGHT +T
Sbjct: 95 LMMEESPNQLNFTHFLTLFGEKLGHTDPEST 125

```

Figure 1
Screenshot of a Blastx Output.

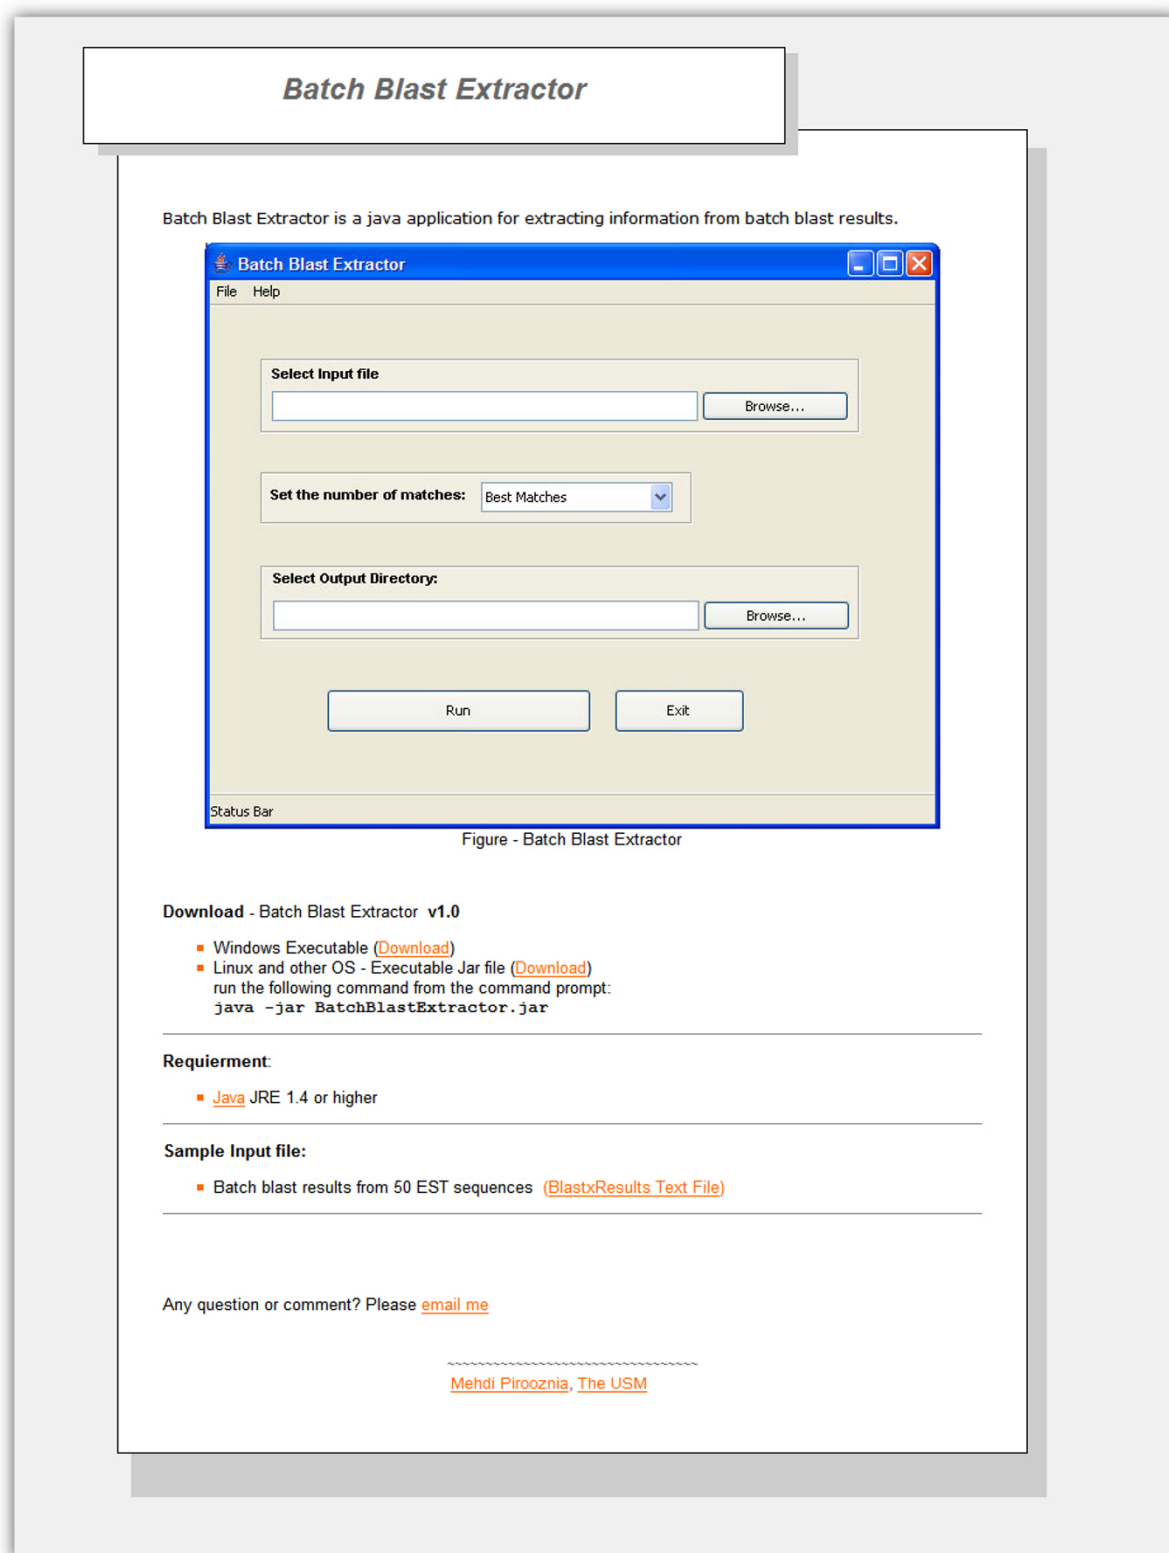


Figure 2
Screenshot of the Batch Blast Extractor Web site.

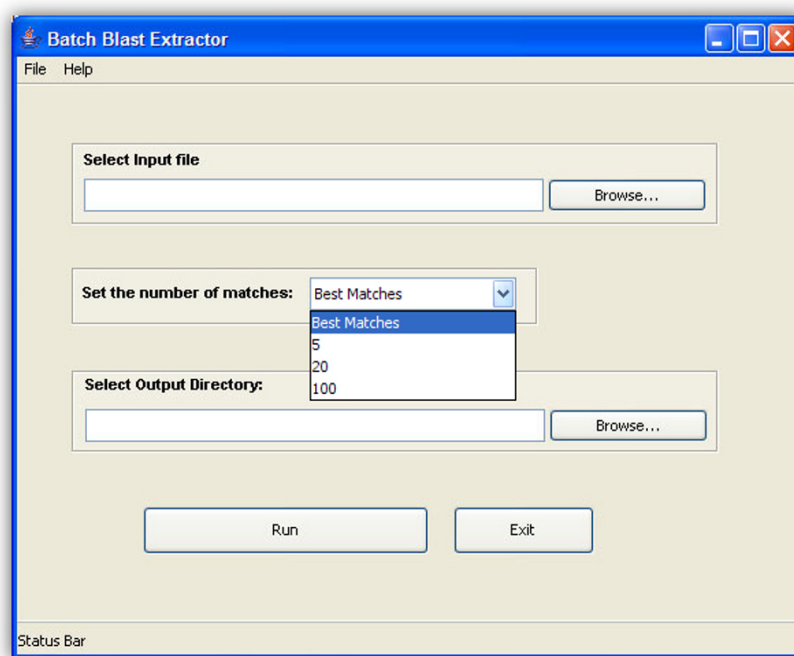


Figure 3
The Batch Blast Extractor Graphical User Interface.

The BLAST programs all provide information in roughly the same format. First comes (A) an introduction to the program; (B) a histogram of expectations if one was requested; (C) a series of one-line descriptions of matching database sequences; (D) the actual sequence alignments, and finally the parameters and other statistics gathered during the search. However, for genome-wide comparisons involving multiple queries (batch query), the search is a challenge. For instance, EST collections are currently produced for many species as an efficient strategy for gene identification. Analysis of the ESTs involves clustering, contig formation and annotation of thousands of fragments, interpretation of which may involve thousands of individual BLAST searches [2-5]. An automated post processing of the output (Figure 1) can simplify the analysis in such cases. The blast parser (BlastLikeSax-Parser) in BioJava [6] and BPlite from BioPerl [7] are frequently being used to parse a variety of different blast outputs, but neither are user friendly and therefore programming skills are needed to use these applications.

We developed the "Batch Blast Extractor" program (Figure 2 and 3) for use in this regard. It serves as a parser storing only the essential features of BLAST hits in a tabular form. The user can then apply a number of selection criteria to filter out hits with particular attributes. "Batch Blast Extractor" thus serves as a powerful annotation tool for large sets of query sequences.

Results

The application generates a tab delimited text file that can be easily imported into any statistical package such as Excel or SPSS for further analysis. For each BLAST hit, the program derives and saves the following features: Query ID, Query Length, Accession version and GI number, Alignment Length, Score, bit, E-value, Identities, Positives, Gaps, Frame, Organism, and Description.

The extracted information includes the following:

- Query: headers of sequences to analyze
- Subject: headers of sequences found in the database
- Score: a number representation (e.g. 550)
- Score Text: full text representation plus BITS (e.g. 235 bits (450))
- Expect: the E-Value as number (e.g. 1e-166)
- Identities %: a number representation (e.g. 85)
- Identities Text: full text representation plus characters matching (e.g. 110/130 (90%))
- Positives %: a number representation (e.g. 92)

- Positives Text: full text representation (e.g. 110/130 (90%))
- Gaps %: a number representation (e.g. 11)
- Gaps Text: full text representation plus voids (e.g. 9/102 (9%))
- Frame: orientation of the translated ORF (e.g. +3)
- Length Query: the number of nucleotides or amino acids (e.g. 400)
- Length Subject: the number of nucleotides or amino acids (e.g. 500)
- Position Query: as text representation plus the length of the frame (e.g. 328–600 (360))
- Position Subject: as text representation plus the length of the frame (e.g. 1–110 (120))

The program was written in Java. It is OS independent and works on both Windows and Linux OS with java 1.4 and higher. It is freely available to noncommercial users from: <http://mcabc.usm.edu/BatchBlastExtractor/> (Figure 2 and 3).

Currently the application works with blastx results. Efforts to extend functionality to other BLAST programs such as blastp and blastn are in progress.

Competing interests

The authors declare that they have no competing interests.

Authors' contributions

MP and YD initiated the project. MP designed, programmed and implemented the application and drafted the manuscript. EJP and YP directed the project. All authors read and approved the final manuscript.

Acknowledgements

This work was supported by the Mississippi Functional Genomics Networks (MFGN), Mississippi Computational Biology Consortium (MCBC) (NSF Grant # EPS-0556308), and the Army Environmental Quality Program of the US Army Corps of Engineers under contract #W912HZ-05-P-0145. Permission was granted by the Chief of Engineers to publish this information.

This article has been published as part of *BMC Genomics* Volume 9 Supplement 2, 2008: IEEE 7th International Conference on Bioinformatics and Bioengineering at Harvard Medical School. The full contents of the supplement are available online at <http://www.biomedcentral.com/1471-2164/9?issue=S2>

References

1. Altschul SF, Madden TL, Schaffer AA, Zhang J, Zhang Z, Miller W, Lipman DJ: **Gapped BLAST and PSI-BLAST: a new generation of protein database search programs.** *Nucleic Acids Res* 1997, **25(17)**:3389-3402.
2. Ashburner M, Ball CA, Blake JA, Botstein D, Butler H, Cherry JM, Davis AP, Dolinski K, Dwight SS, Eppig JT, et al.: **Gene ontology: tool for the unification of biology. The Gene Ontology Consortium.** *Nat Genet* 2000, **25(1)**:25-29.
3. Liang C, Wang G, Liu L, Ji G, Liu Y, Chen J, Webb JS, Reese G, Dean JF: **WebTraceMiner: a web service for processing and mining EST sequence trace files.** *Nucleic Acids Res* 2007:W137-142.
4. Nagaraj SH, Deshpande N, Gasser RB, Ranganathan S: **ESTExplorer: an expressed sequence tag (EST) assembly and annotation platform.** *Nucleic Acids Res* 2007:W143-147.
5. Pirooznia M, Gong P, Guan X, Inouye LS, Yang K, Perkins EJ, Deng Y: **Cloning, analysis and functional annotation of expressed sequence tags from the Earthworm *Eisenia fetida*.** *BMC Bioinformatics* 2007, **8(Suppl 7)**:S7.
6. Mangalam H: **The Bio* toolkits – a brief overview.** *Brief Bioinform* 2002, **3(3)**:296-302.
7. Stajich JE, Block D, Boulez K, Brenner SE, Chervitz SA, Dagdigan C, Fuellen G, Gilbert JG, Korf I, Lapp H, et al.: **The Bioperl toolkit: Perl modules for the life sciences.** *Genome Res* 2002, **12(10)**:1611-1618.

Publish with **BioMed Central** and every scientist can read your work free of charge

"BioMed Central will be the most significant development for disseminating the results of biomedical research in our lifetime."

Sir Paul Nurse, Cancer Research UK

Your research papers will be:

- available free of charge to the entire biomedical community
- peer reviewed and published immediately upon acceptance
- cited in PubMed and archived on PubMed Central
- yours — you keep the copyright

Submit your manuscript here:
http://www.biomedcentral.com/info/publishing_adv.asp

